

FIRE ROCK™

STONE WOOL BLANKET

Description

Stone wool is inorganic spun fibers made from natural rocks and minerals.

FIRE ROCK™ made of Stone wool is non-combustible, suitable for thermal insulation, fire protection and sound absorption/noise reduction.

FIREROCK BLANKET is suitable for general insulation purposes on the application in industrial and commercial buildings.

*FIRE ROCK™ is a trademark of Nichias Corporation



■ Standard Densities and Sizes

Product Name		Nominal Density	Standard Thickness (mm)	Standard Size (mm)
		(kg/m ³)		
FIRE ROCK	040	40	25, 40, 50, 75 and 100	600 X 5000
	060	60		
	080	80		
	100	100		
	120	120		

* Other densities and sizes are also available on request. For details, please contact us.

■ Maximum Service Temperature and Classification

Product Name		Nominal Density	Max. Service Temperature (°C)	Test Method	Classification by ASTM
		(kg/m ³)			
FIRE ROCK	060	60	650	ASTM C411	Type IV
	080	80			
	100	100			
	120	120			

■ Apparent Thermal Conductivities

Product Name	Apparent Thermal Conductivities (W/mK)					Test Method	
	Nominal Density (kg/m ³)	60	80	100	120		
FIRE ROCK	Mean Temperature (°C)	24	0.033	0.034	0.034	0.034	ASTM C177
		38	0.036	0.035	0.036	0.036	
		93	0.045	0.043	0.043	0.043	
		149	0.056	0.052	0.050	0.049	
		204	0.064	0.059	0.057	0.055	
		260	0.083	0.072	0.069	0.065	
		316	0.101	0.088	0.082	0.077	
		370	0.121	0.105	0.097	0.089	
	Average 70 +5/-0	0.044 max. (Conform to JIS A9504 requirement)				JIS A1412 ISO 8302	

* These figures are actual test result and shall not be used for specification purpose.

P.T. NICHIAS ROCKWOOL INDONESIA

Technical Properties

Items	Unit	MG Board #100 Test Results	Spec.	Test Method
Linear shrinkage at 650°C	%	0.55	2.0 max.	ASTM C356
Fire tests on building materials	-	Non-combustible	-	BS 476 Part 4
Surface burning characteristics	Index	Flame spread 0	25 max	ASTM E84
	Index	Smoke developed 0	50 max	
Water vapor sorption	%	0.19	5.0 max.	ASTM C1104
Water absorption	kg/m ²	0.044	-	EN 1609
Non fibrous (shot) content	%	150 µm	13.0	ASTM C1335
		500 µm	1.6	JIS A9504
Corrosive resistances	-	Passed 28 day preproduction corrosion test		ASTM C795
Odor emission	-	Pass	-	ASTM C1304
Sound absorption	-	SAA *	1.0	ASTM C423
	-	NRC *	1.0	

* SAA : Sound Absorption Average NRC: Noise Reduction Coefficient


Conforming Specification

- ASTM C612 Mineral Fiber Block and Blanket Board Thermal Insulation Type IV
 - JIS A 9504 Man made mineral fiber thermal insulation materials
- Stone wool Blanket No. 1 and 2 (Density : 40 ~ 100 and 101 ~ 160 kg/m³)**

Remarks : For JIS A9504, our board size (600 x 1200mm) is not conforming to this specification since JIS requirement is either 605 x 910 mm or 605 x 1210mm.

Handling & Storage

- Handling carefully, avoid damages on the edge and surfaces of product
- Store in indoor and protect from direct exposure to the water

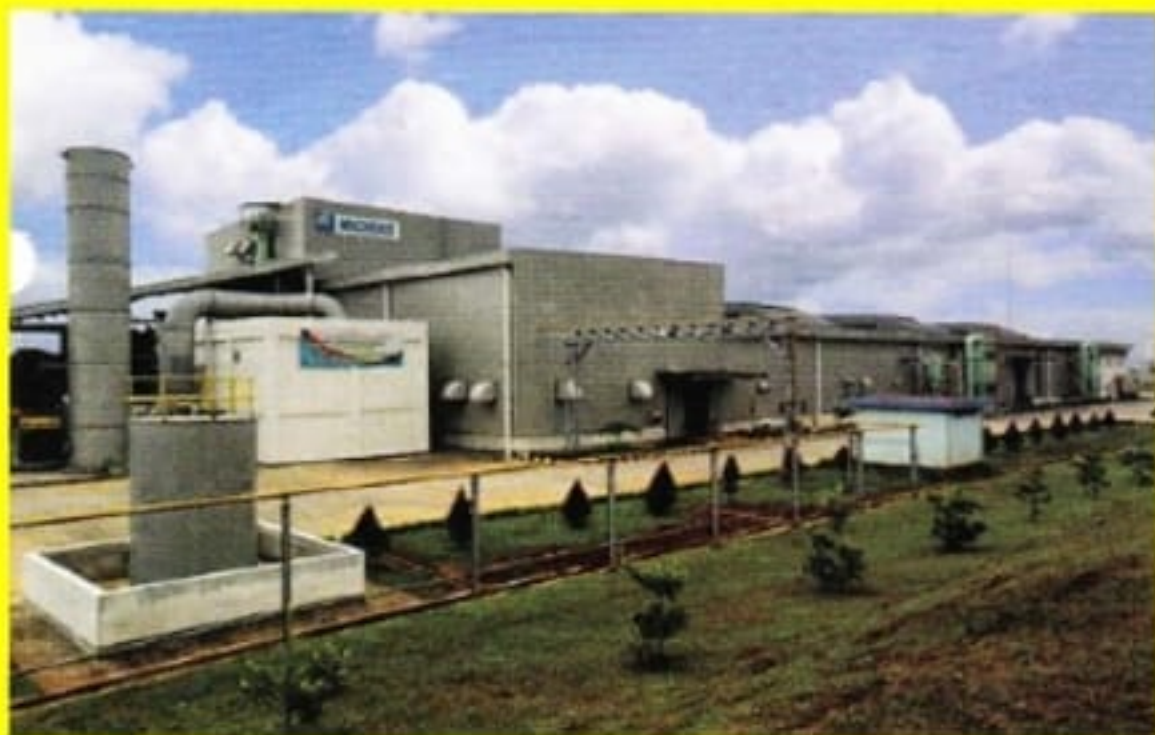

This product does not contain any asbestos fibers nor Freon such as CFCs, HFCs, SCFs, HCFCs which will affect environment.

Manufacturer

PT. NICHIAS ROCKWOOL INDONESIA

Karawang, Jawa Barat, Indonesia

Local Distributor



⚠ Cautions

- 1) The information and recommendation in this catalog are based on our present state of knowledge and given in good faith for customer guidance purpose, and no liability will be accepted in relation to the same.
- 2) Properties/ applications shown in this catalog are typical. The products shown in this catalog shall not be used for any purpose other than prescribed application.
- 3) Performance data shown in this catalog are developed from in-house testing and/or field report from customers. Failure to select the proper products could result in property damage and/or serious personal injury.
- 4) Performance verification under actual operating conditions is recommended even for the application shown in this catalog.
- 5) While the utmost care has been used in compiling this catalog, we assume no responsibility for errors. This edition cancels previous issues and contents of this catalog are subject to change without prior notice.
- 6) For safe handling recommendation and health related effects, refer to the safety data sheet (SDS) of each product, available on request.
- 7) All or any part of the content on this catalog may not be copied, duplicated, imitated, revised and reproduced without prior permission of PT. NICHIAS ROCKWOOL INDONESIA.